



Product Data Sheet

ZP785-3


Addressable callpoint

Modern stylish design

The ZP785-3 is an addressable call point of stylish design, providing a manual means of initiating a fire alarm on ZP3 analogue addressable systems.

Complying with EN 54 Part 11, the ZP785-3 is suitable for installations meeting the recommendations of many local codes (e.g. BS 5839 Part 1).

The unit is operated either by pressing a resettable element (EN54 Part 11) or by breaking a frangible glass with finger pressure. Glass elements have clear vinyl coatings on the front surface to prevent operator injury and to inhibit the release of loose fragments as the glass is broken. Both operating elements are easily interchangeable.

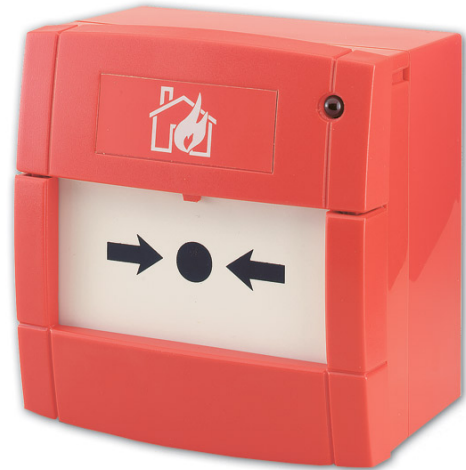

Plug in loop connection

Installed as part of the ZP3 analogue addressable system, up to 127 devices (call points, sensors and interface units) can be connected to each of the control panel loops. All loop devices incorporate switch settings enabling them to be assigned a unique address, which is polled by the panel every two seconds.

ZP785-3 callpoints are designed for semi recessed fixing, using a standard single gang socket box, or can be surface mounted by means of a Z-CPSB-1 matching plastic back box.

Push in terminals enable the device to be plugged directly into the loop, making replacement simple and reducing internal cable ends to a minimum.

System testing, glass replacement and reset are carried out by using a special maintenance tool enabling part of the front moulding including the glass, to be lowered, allowing the device to operate.

Polycarbonate front cover option

Rated at IP24 the ZP785-3 moulding is constructed of ABS plastic and intended for indoor applications. A red LED indicator is prominently positioned on the front of the unit, which illuminates when the device is operated. For locations where malicious operation, or accidental impact from flying objects may occur (for example sports halls), operation can be restricted by the addition of a clear, polycarbonate, front cover (Z-MCP-HC), which can be further protected by a cover seal (Z-MCP-HCS).

Standard Features

- Modern stylish design
- Complies with EN54 Part11
- Resettable or frangible operating elements
- Single maintenance tool
- Plug in loop connection

ZP785-3


Addressable callpoint

Specifications

Model No	ZP785-3
Specification	EN54 Pt11
Description	Addressable callpoint
Compatibility	All ZP analogue addressable systems
Mounting	Addition of Z-CPSB-1 back box for surface or single gang socket box for semi flush fixing
Wiring	ZP loop - 2 core plus screen, continuity must be maintained.
Monitoring	Open and short circuit loop wiring faults
Operating principle	Micro switch
Indication	Alarm LED (red)
Operating voltage	16 - 22 Vdc
Current	600uA quiescent, 700uA alarm
Application	Indoor installation
EN60529 rating	IP24
Temperature range	-30°C to +70°C
Humidity range	0% to 95% RH (non condensing)
EMC	CE marked (EEC89/336)
Material	Moulded ABS
Dimensions	93mm (H) x 89mm (W) x 27.5mm (D) – recessed 59.5mm (D) - with surface back box
Colour	Red
Weight	125g
Publication No	PS1249

Ordering Information

Part No.	Description
ZP785-3	Addressable callpoint

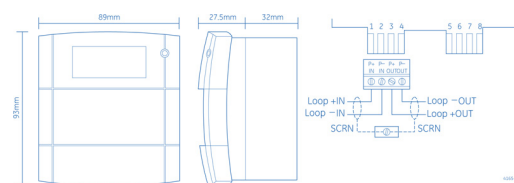

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

IPS-ZP785-3-2010-10-21 08:45:00 Released : 07-JUL-10

UK Sales: 8 Newmarket Court, Chippenham Drive, Kingston, Milton Keynes, MK10 0AQ, United Kingdom, Telephone +44 (0) 1908 281981, Fax +44 (0) 1908 282554
South Africa: Zitton House, 555 Voortrekker Road, Maitland, 7405, P.O. Box 181, Maitland, 7404, South Africa, Telephone +27 (0)21 506 6000, Fax +27 (0)21 506 6050